

Basic Instructions

- Printing** You can print all ENKL products on conventional printer paper but end results may be less stable than those printed onto card. We recommend printing these ENKL products on 250gsm cardstock for best results. Printing onto thicker card may make the models more difficult to build.
- Cutting** Cut along the solid black outlines. You can use either scissors or a craft knife to cut out the model. ENKL recommends using scissors for curved areas and a craft knife for more intricate outlines. Designs can mostly be built without a craft knife unless requiring one is explicitly mentioned.
- Folding** Fold along the dotted lines, following the key below to fold up, or down. For best results we recommend scoring along the lines before folding by lightly pressing on them with either a craft knife or empty ballpoint pen.




- Gluing** Glue the tabs in the order that they're numbered. Every tab consists of white space with a number or letter inside like the example below. For best results use a non-liquid glue that dries quickly and apply it evenly to the entire tab.




- Parts** For models with numerous parts you will find labels on the page to help with the construction. Each part has a label on the page marked "Part X" as well as a smaller label on the parts themselves. When parts need to be glued together the tabs connecting the two parts will be labelled with the corresponding part letter.

X Flyer Instructions

- 1) Cut out the model's parts using the solid black outline.
- 2) Following the key at the bottom of the page, fold and glue together part A.
- 3) Following the key at the bottom of the page, fold the dotted lines on part B and glue the tabs 1-3 (leaving tabs 4,5 and 6 unglued).
- 4) Glue parts A and B together using the tabs marked "A" so it looks like the diagram below.

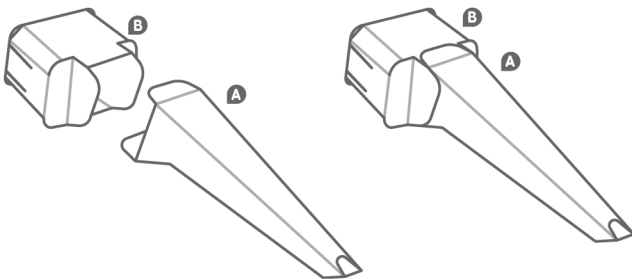


- 5) Fold over the wings (parts C and D), gluing the back of the pages together.
- 6) Slot the wings together into an X shape and then slot the wings into the back of part B so it looks like the diagram below.

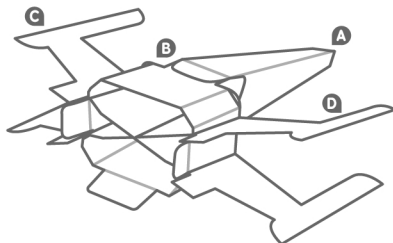


- 7) Glue down tabs 4,5 and 6 on part B to enclose the back of the wings.

H Wing Instructions

- 1) Cut out the model's parts using the solid black outline.
- 2) Following the key at the bottom of the page, fold and glue together part A. The back of part A should look like the diagram below.



- 3) Fold and glue together parts B and C and then attach them to part A using the tabs marked B and C located on part A. It should look like the diagram below.

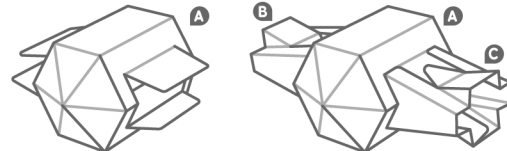

- 4) Fold over the hexagonal wings (parts D and E), gluing the backs of the parts together (being sure not to glue the tabs down).
- 5) Attach the parts D and E to the rest of the model using the tabs marked "D" and "E" on the exposed sections. It should look like the diagram below.

